

US2A THRU US2M

VOLTAGE RANGE

50 to 1000 Volts

CURRENT


2.0 Ampere

FEATURES

- Plastic package has UL flammability Classification 94V-0
- Glass Passivated chip junction
- Built in strain relief
- Fast switching speed for high efficiency
- High temperature soldering guaranteed: 250°C/10 seconds

MECHANICAL DATA

- Case: JEDEC DO-214AA transfer molded plastic
- Terminals: Solder plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Weight: 0.003 ounce, 0.093 gram

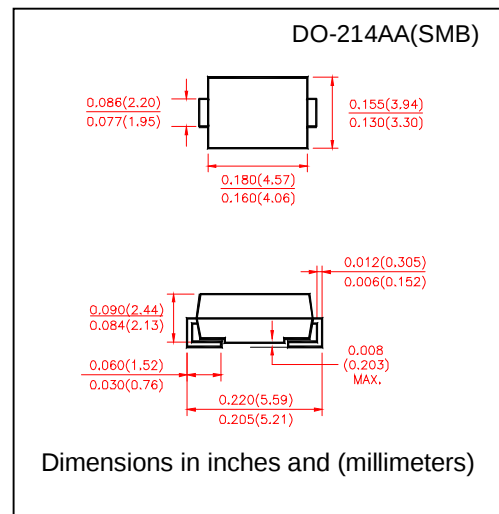

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified.
- Single phase, half wave, 60Hz, resistive or inductive load.
- For capacitive load derate current by 20%.

MAXIMUM RATINGS & THERMAL CHARACTERISTICS

PARAMETELS		SYMBOLS	US2A	US2B	US2D	US2G	US2J	US2K	US2M	UNIT
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage		V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current At T _L =105℃ (NOTE 1)		I _(AV)	2.0							Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)		I _{FSM}	50							Amps
Maximum Instantaneous Forward Voltage at 2.0A		V _F	1.0			1.3	1.7			Volts
Maximum DC Reverse Current At rated DC blocking voltage at	T _A =25℃	I _R	5.0							μA
	T _A =125℃		100							
Maximum Reverse Recovery Time Test conditions I _F =0.5A, I _R =1.0A, I _{RR} =0.25A		t _{rr}	50			100				nS
Typical Juntion Capacitance (Measured at 1.0MHz and applied reverse voltage of 4.0V)		C _J	50			30				pF
Typical Thermal Resistance (NOTE 1)		R _{0JA}	75							℃/W
		R _{0JL}	17							
Operating Junction Temperature		T _J	(-55 to +150)							℃
Storage Tempetature Rang		T _{STG}	(-55 to +150)							℃

Notes:

- Thermal resistance from Junction to ambient and from junction to lead mounted on P.C.B. with 0.3×0.3" (8.0 × 8.0mm) copper pad areas.

SURFACE MOUNT HIGH EFFICIENCY RECTIFIER

US2A THRU US2M

VOLTAGE RANGE

50 to 1000 Volts

CURRENT

2.0 Ampere

RATING AND CHARACTERISTIC CURVES US2A THRU US2M

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

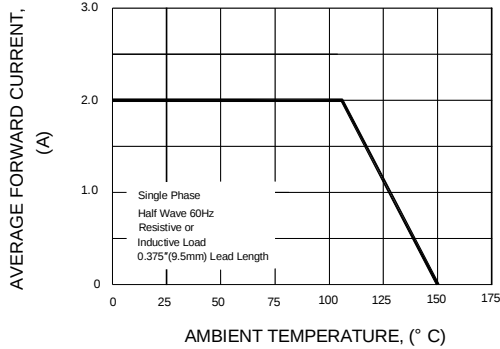


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

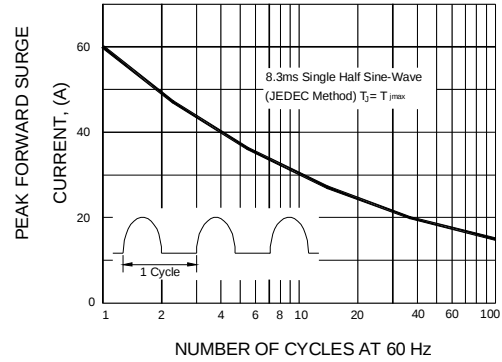


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

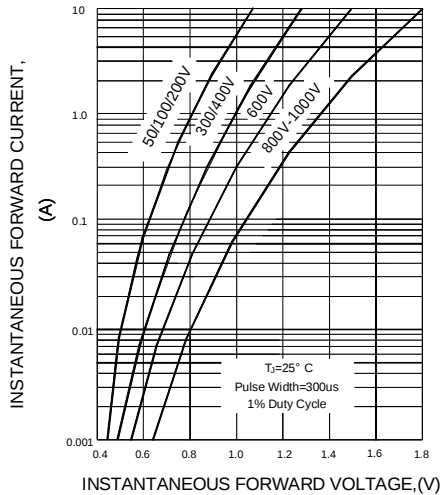


FIG.4-TYPICAL REVERSE CHARACTERISTICS

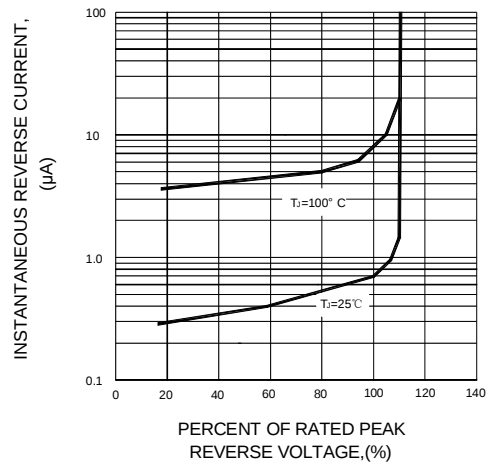


FIG.5-TYPICAL JUNCTION CAPACITANCE


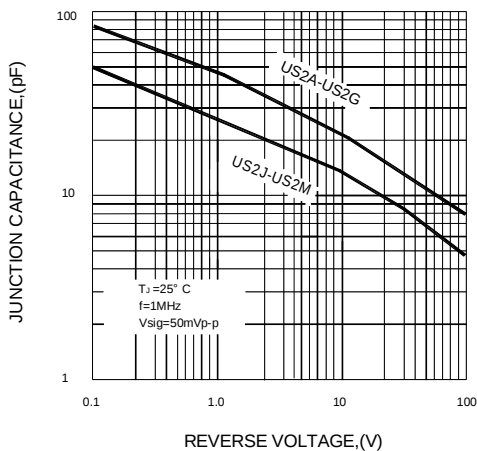


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

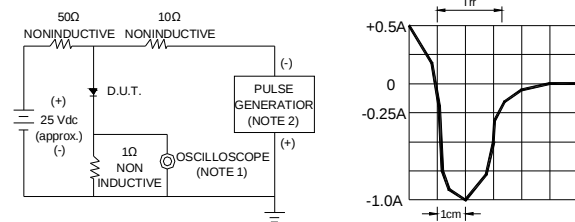

NOTES : 1.Rise Time=7ns max. Input Impedance=1 magohm, 22pF
2.Rise time=10ns max. Source Impedance=50 ohms

SET TIME BASE FOR 50/100ns/cm