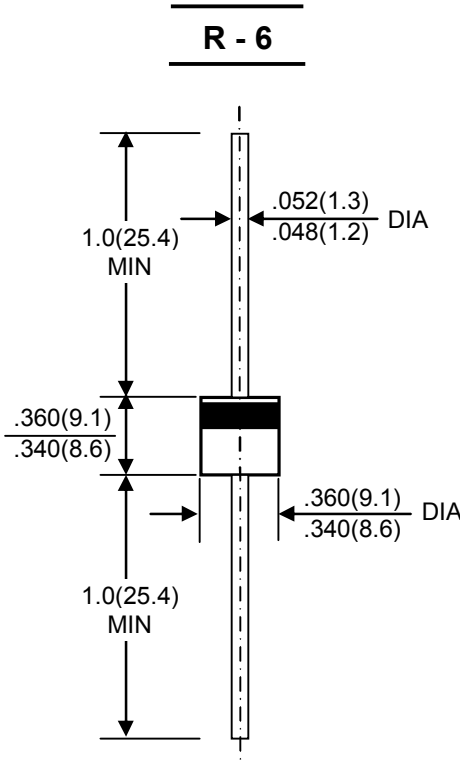


SCHOTTKY BARRIER RECTIFIERS		REVERSE VOLTAGE -30 to 100Volts FORWARD CURRENT -10.0 Amperes								
FEATURES ●Metal of silicon rectifier , majority carrier conduction ●Guard ring for transient protection ●Low power loss,high efficiency ●High current capability,low VF ●High surge capacity ●Plastic package has UL flammability classification 94V-0 ●For use in low voltage,high frequency inverters,free wheeling,and polarity protection applications MECHANICAL DATA ●Case: JEDEC R-6 molded plastic ●Polarity: Color band denotes cathode ●Weight: 0.07 ounces , 2.1 grams ●Mounting position: Any		R - 6  Dimensions in inches and (millimeters)								
MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS										
Rating at 25°C ambient temperature unless otherwise specified.										
Single phase, half wave ,60Hz, resistive or inductive load.										
For capacitive load, derate current by 20%										
CHARACTERISTICS	SYMBOL	10SQ030	10SQ035	10SQ040	10SQ045	10SQ050	10SQ060	10SQ080	10SQ100	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	30	35	40	45	50	60	80	100	V
Maximum RMS Voltage	VRMS	21	24.5	28	31.5	35	42	56	70	V
Maximum DC Blocking Voltage	VDC	30	35	40	45	50	60	80	100	V
Maximum Average Forward Rectified Current@Tc=95 °C	I(AV)	10								A
Peak Forward Surage Current 8.3ms single half sine-wave super imposed on rated load(JEDEC Method)	IFSM	275								A
Peak Forward Voltage at 10A DC(Note1)	VF	0.55				0.7		0.8		V
Maximum DC Reverse Current @Tj=25°C at Rated DC Bolcking Voltage @Tj=100°C	IR	0.5				50				mA
Tyical Junction Capacitance (Note2)	CJ	450								PF
Tyical Thermal Resistance (Note3)	RθJC	3.0								°C/w
Operating Temperature Range	TJ	-55 to+150								°C
Storage Temperature Range	TSTG	-55 to+150								°C
NOTES:1.300us Pulse Width, 2%Dudy Cycle.										
2.Measured at 1.0 MHZ and applied reverse voltage of 4.0VDC.										
3.Thermal Resistance Junction to Case.										

RATING AND CHARACTERISTIC CURVES

10SQ030 thru 10SQ100

FIG.1-FORWARD CURRENT DERATING CURVE

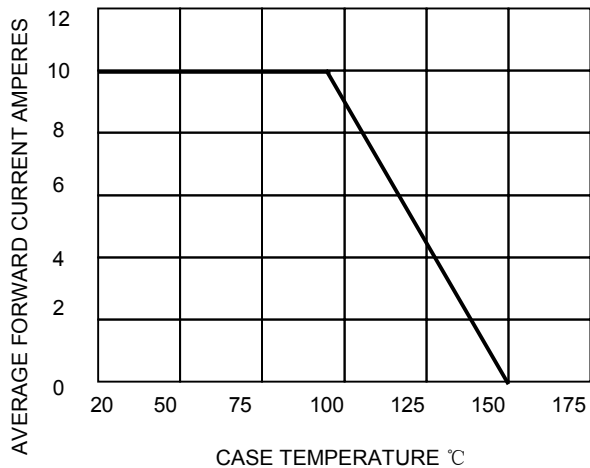


FIG.2-MAXIMUM NON-REPETITIVE SURGE

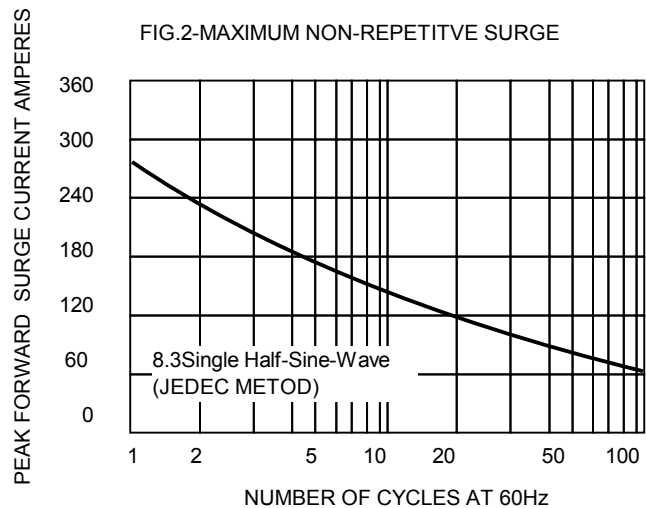


FIG.3-TYPICAL REVERSE CHARACTERISTICS

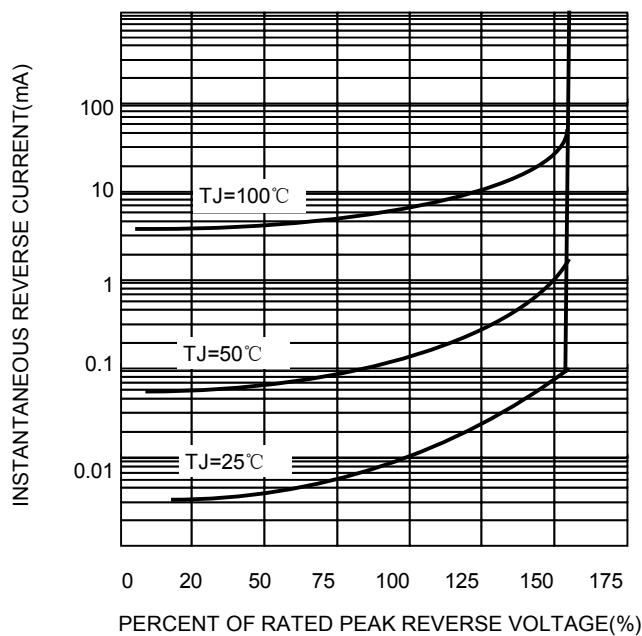


FIG.4-TYPICAL FORWARD CHARACTERISTICS

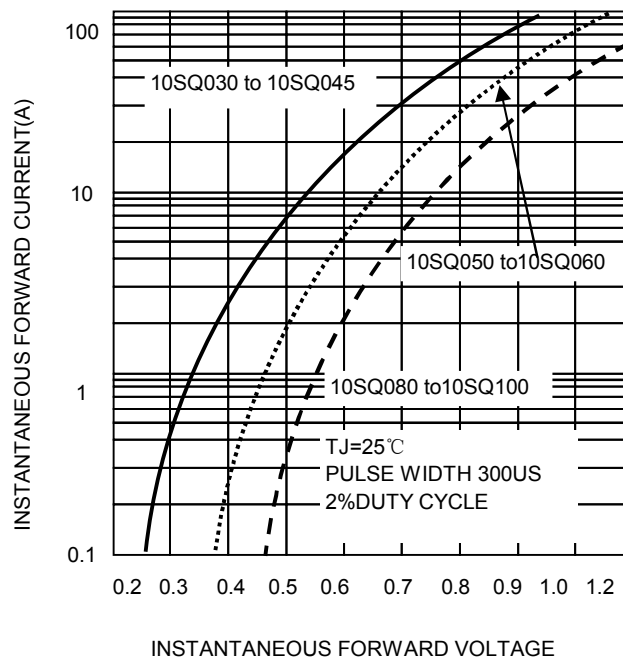


FIG.5-TYPICAL JUNCTION CAPACITANCE

