

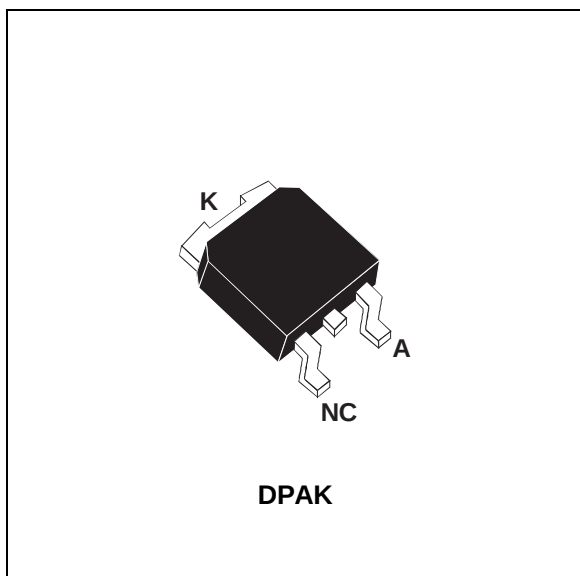
TURBOSWITCH™ ULTRA-FAST HIGH VOLTAGE DIODE

MAIN PRODUCT CHARACTERISTICS

$I_{F(AV)}$	3 A
V_{RRM}	600 V
$t_{rr} (typ)$	20 ns
$V_F (max)$	1.65 V

FEATURES AND BENEFITS

- SPECIFIC TO FREEWHEEL MODE OPERATIONS: FREEWHEEL OR BOOSTER DIODE.
- ULTRA-FAST, AND SOFT RECOVERY.
- VERY LOW OVERALL POWER LOSSES IN BOTH THE DIODE AND THE COMPANION TRANSISTOR.
- HIGH FREQUENCY OPERATIONS.



DESCRIPTION

The TURBOSWITCH is a very high performance series of ultra-fast high voltage power diodes. TURBOSWITCH family drastically cuts losses in both the diode and the associated switching IGBT or MOSFET in all freewheel mode operations and is particularly suitable and efficient in motor control

freewheel applications and in booster diode applications in Power Factor Control circuitries.

Packaged in DPAK, these 600V devices are particularly intended for use on 240V domestic mains.

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter		Value	Unit
V_{RRM}	Repetitive peak reverse voltage		600	V
$I_{F(RMS)}$	RMS forward current		6	A
I_{FRM}	Repetitive peak forward current	$t_p=5 \mu s$ F=5 kHz square	20	A
I_{FSM}	Surge non repetitive forward current	$t_p=10$ ms sinusoidal	35	A
T_j	Maximum operating junction temperature		125	°C
T_{stg}	Storage temperature range		- 65 to + 150	°C

TM : TURBOSWITCH is a trademark from STMicroelectronics

STTA306B

THERMAL AND POWER DATA

Symbol	Parameter	Tests conditions	Value	Unit
$R_{th(j-c)}$	Junction to case		6	°C/W
P_1	Conduction power dissipation	$I_{F(AV)} = 1.5A$, $\delta = 0.5$ $T_c = 110^\circ C$	2.5	W
P_{max}	Total power dissipation $P_{max} = P_1 + P_3$ ($P_3 = 10\% P_1$)	$T_c = 108^\circ C$	2.8	W

STATIC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Tests conditions		Min.	Typ.	Max.	Unit
V_F^{**}	Forward voltage drop	$T_j = 25^\circ C$	$I_F = 3A$			1.85	V
		$T_j = 125^\circ C$	$I_F = 3A$		1.3	1.65	
I_R^*	Reverse leakage current	$T_j = 25^\circ C$	$V_R = 0.8 \times V_{RRM}$			20	μA
		$T_j = 125^\circ C$			500	1200	
V_{to}	Threshold voltage	$I_p < 3 \cdot I_{F(AV)}$	$T_j = 125^\circ C$			1.15	V
R_d	Dynamic resistance					175	m Ω

Test pulse : * $t_p = 380 \mu s$, $\delta < 2\%$

** $t_p = 5 ms$, $\delta < 2\%$

To evaluate the maximum conduction losses use the following equation :

$$P = V_{to} \times I_{F(AV)} + R_d \times I_F^2 (RMS)$$







DYNAMIC ELECTRICAL CHARACTERISTICS

TURN-OFF SWITCHING

Symbol	Parameter	Test conditions		Min.	Typ.	Max.	Unit
t_{rr}		$T_j = 25^\circ C$	$I_F=0.5A$ $I_R=1A$ $I_{rr}=0.25A$ $I_F=1A$ $di_F/dt = -50A/\mu s$ $V_R=30V$		20	50	ns
I_{RM}	Maximum reverse recovery current	$T_j = 125^\circ C$	$I_F=3A$ $V_R=400V$ $di_F/dt = -16A/\mu s$ $di_F/dt = -50A/\mu s$		2.0	1.2	A
S factor	Softness factor	$T_j = 125^\circ C$	$V_R=400V$ $I_F=3A$ $di_F/dt = -50A/\mu s$		1.1		-


TURN-ON SWITCHING

Symbol	Parameter	Test conditions		Min.	Typ.	Max.	Unit
t_{fr}	Forward recovery time	$T_j = 25^\circ C$	$I_F=3A$ $di_F/dt = 16A/\mu s$ Measured at $1.1 \times V_{Fmax}$			500	ns
V_{FP}	Peak forward voltage	$T_j = 25^\circ C$	$I_F=2A$ $di_F/dt = 16A/\mu s$			10	V

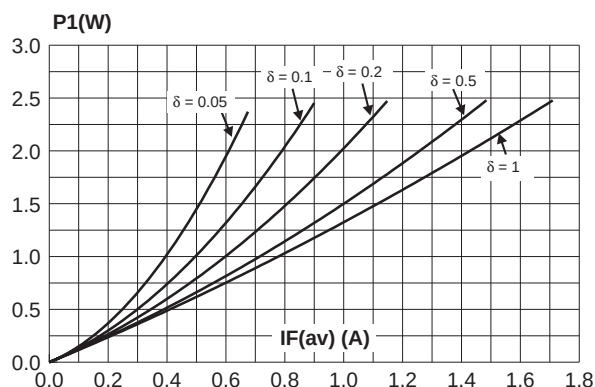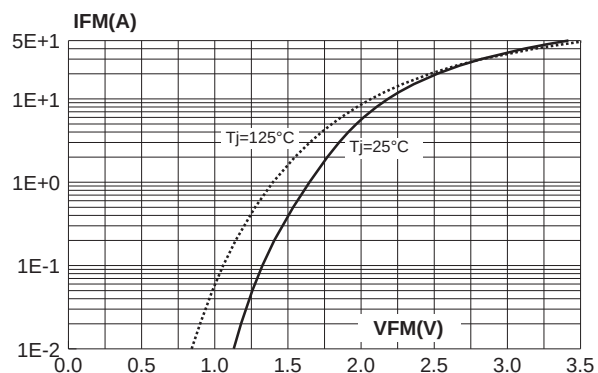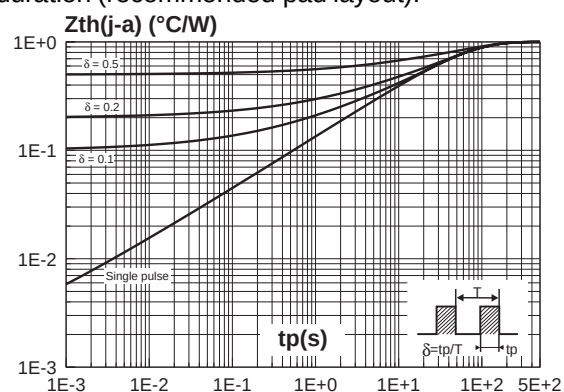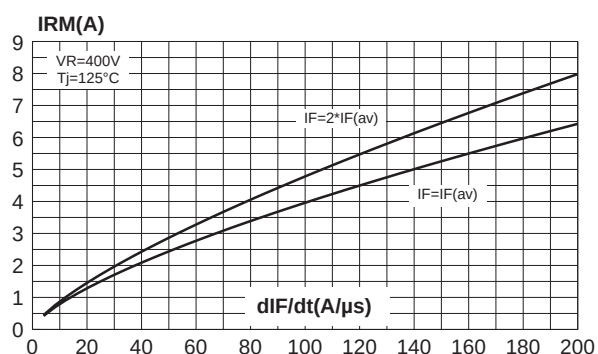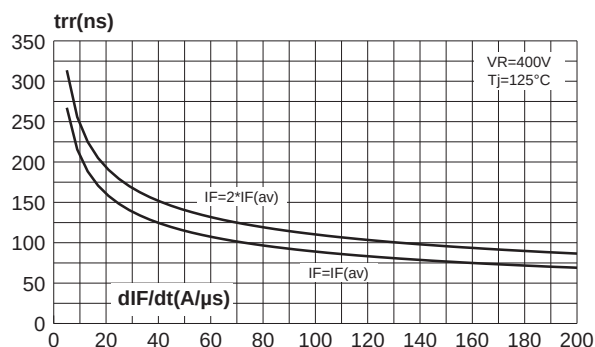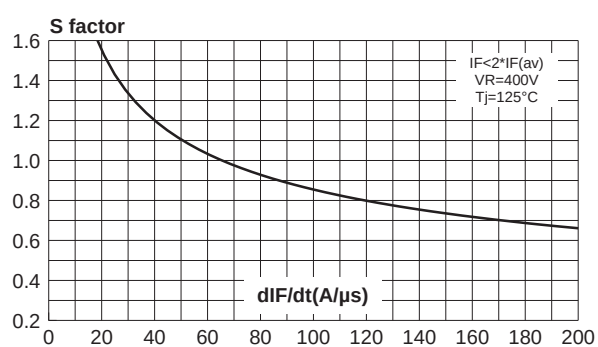
Fig. 1: Conduction losses versus average current.**Fig. 2:** Forward voltage drop versus forward current (maximum values).**Fig. 3:** Relative variation of thermal transient impedance junction to ambient versus pulse duration (recommended pad layout).**Fig. 4:** Peak reverse recovery current versus dI_F/dt (90% confidence).**Fig. 5:** Reverse recovery time versus dI_F/dt (90% confidence).**Fig. 6:** Softness factor (t_b/t_a) versus dI_F/dt (typical values).

STTA306B

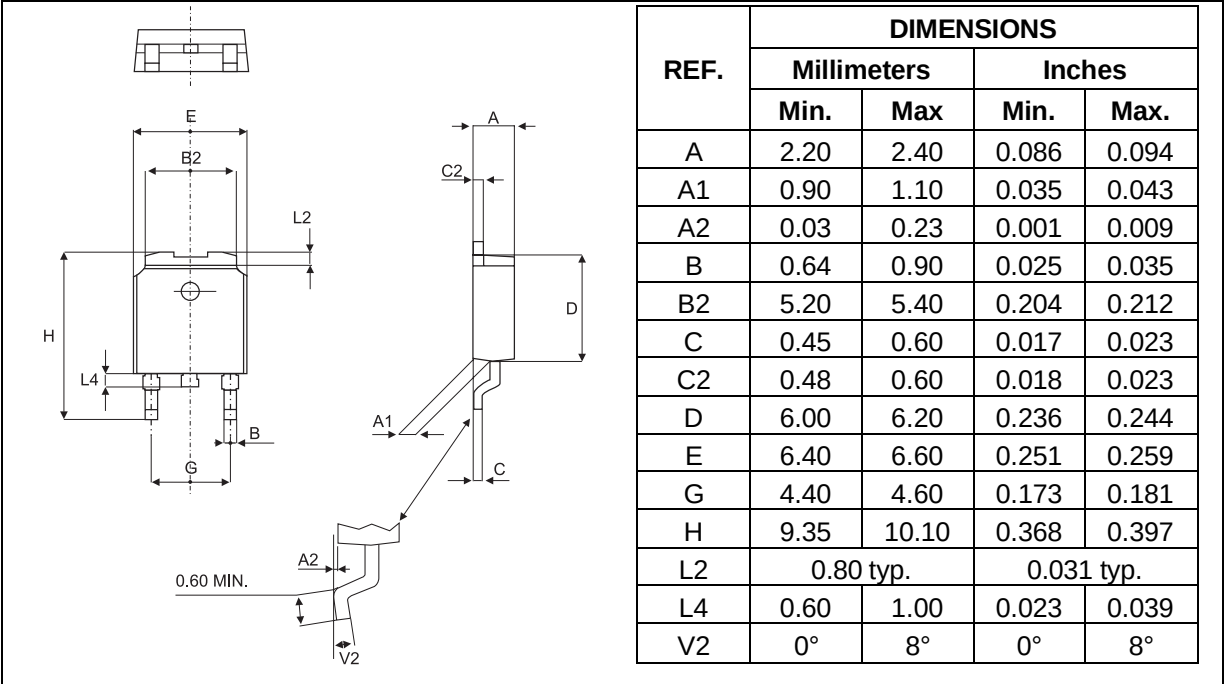PACKAGE MECHANICAL DATA
DPAK



FOOTPRINT DIMENSIONS (in millimeters)

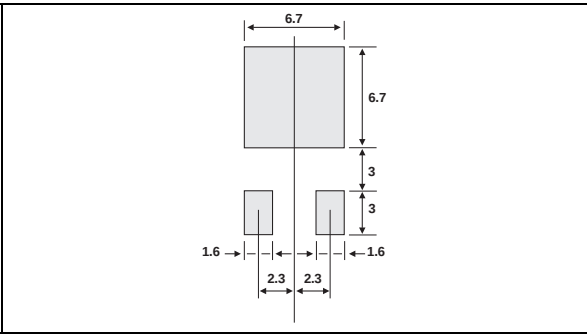

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STTA306B	A306	DPAK	0.3 g.	75	Tube
STTA306B-TR	A306	DPAK	0.3 g.	2500	Tape & reel

■ Epoxy meets UL94,V0